

Features

- MOV provides spike and surge protection.
- Automatic relocking time delay.
- Magnetic bond sensor monitor output.
- Anodized aluminum housing.
- Adjustable mounting plate for easy installation.
- Dual Voltage 12 or 24 VDC (selectable)
- Anti-Residual magnetism designed.
- Complete mounting hardware included.

Statement:

IEL-20M time delay electromagnetic locks are manufactured under quality environment back its product quality, performance and commitment to customer satisfaction.


The fail-safe Electromagnetic Lock design with no mechanical parts but magnetic force to secure and release the doors, suitable for use in areas which required access controlled or egress such as exit door.

We offer up to 600 pounds holding force with jumper pin selectable for 12V or 24V DC dual input voltage and can be applied with access control, and with the full range of optional brackets, it can be installed on all type of door frames such as Hollow, Wooden and frameless door. Build in magnetic bond sensor output indicates the door locked or unlocked status.


The time for the door to relock back is depending on the "VR timer adjust" within 50 seconds.

Specifications:

- Voltage Tolerance: 15%
- Current Draw: 470mA@24Vdc: 260mA@24Vdc (at temperature 20°C)
- Magnetic bond sensor monitor output (SPDT rated 0.1A@24VDC), remotely monitors the door lock or unlock status. (NC Output-Door opened; NO Output-Door closed)
- Automatic relocking time delay : (1-50) seconds.
- Operating Temperature: -10-55°C (14-131°F)
- Humidity: 0-95% non-condensing.
- Lock's surface Temperature (when the power is on): current temperature + 20°C
- Holding Force: Up to 600 LBS (272 Kg)
- Dimensions:
Magnet: (L) 250 (W) 48 (D) 30mm
Armature Plate: (L) 162 (W) 40 (D) 11mm
- Special Finishes for magnet and armature plate: Zinc
- Epoxy Potting Compound: E87252 (S), UL94V-0
- Weight (Approx.) 2.0 Kg

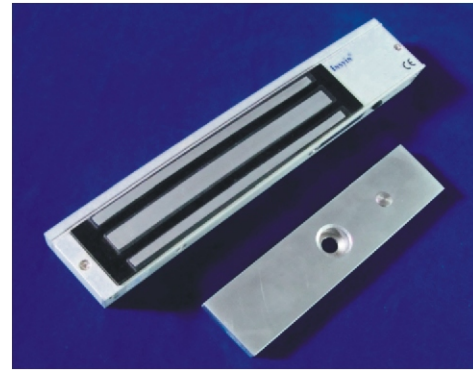

Regular Installation

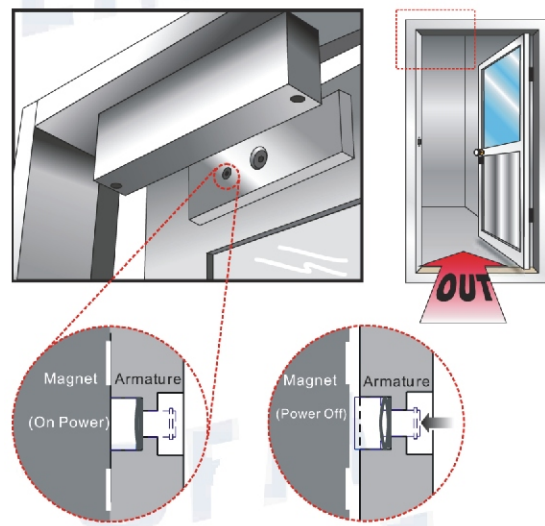

Unique Anti-Residual Design

When there is no power, there will be no holding force, and the push-off button will pop out immediately, to release the Electromagnetic Lock and the Armature Plate for no residual magnetism.

Optional Brackets:

Identify the door swinging direction and inspect the door frame header to determine if bracket is required. L-brackets, LZ-brackets or U-brackets may be required for the electromagnet depending on the frame header and swinging direction

Disclaimer:

The information and specifications printed in this manual are current at the time of publication. The INSYIN policy is one of continual development and improvement; therefore INSYIN reserves the right to change specifications without notice.

Warranty:

INSYIN Electromagnetic Locks are warranted against defects in material and workmanship while used in normal service for a period of 5** years from the date of sale to the original customer.

** Conditions apply.

With L-bracket for narrow door frames

When "A" < 42mm, must installed with "L" brackets

L-600

With LZ-bracket for in-swinging doors

LZ-600

With U-bracket for frameless glass doors.

U-600
For upto 12mm thickness of glass door

